

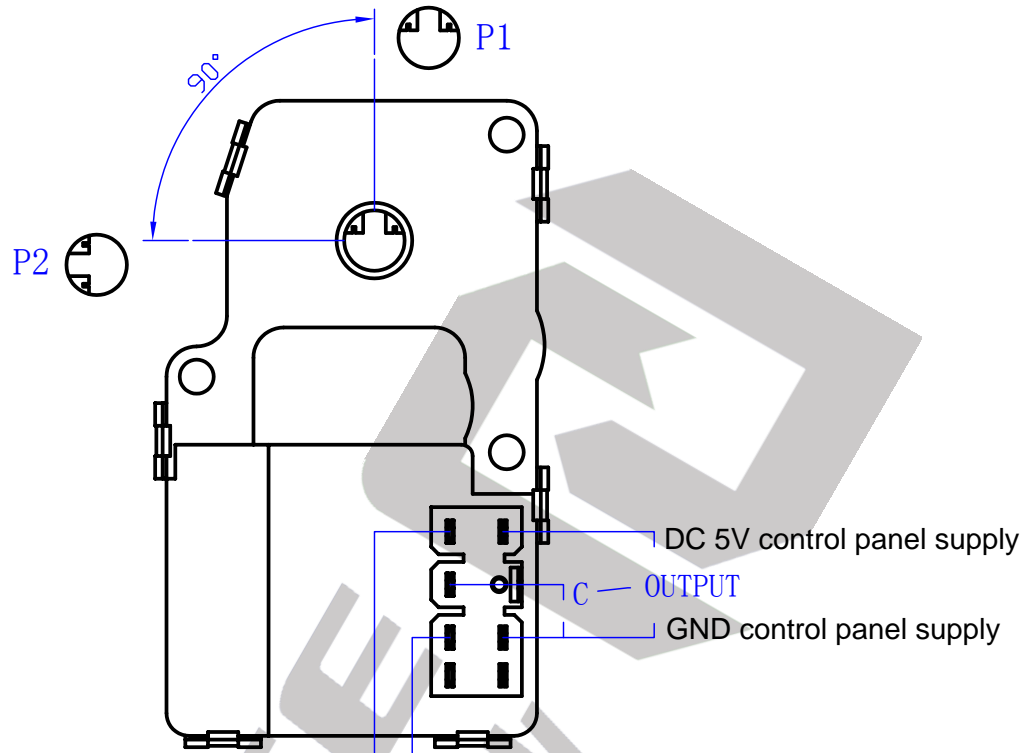


Technical data	
Power supply	DC12/DC24V
Current	Max.70mA
Power consumption	3W
Rotate direction	CW/CCW
Torque	4kgf.cm
Locked torque	12kgf.cm
Locked current	Max.250mA
Rotate angle	90°(Adjustable)

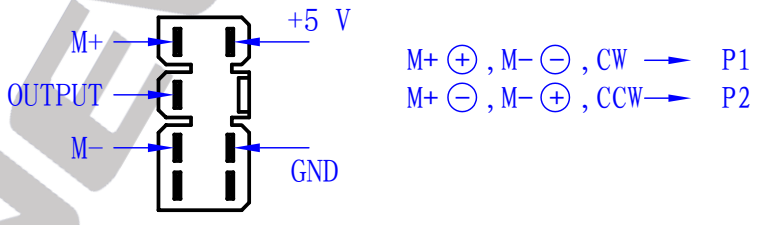

The control panel get the information of actuator angle through the outputting voltage signal, it will regulate the polarity of M+ and M-, so as to the reach the demanded angle position.

Electrical diagram

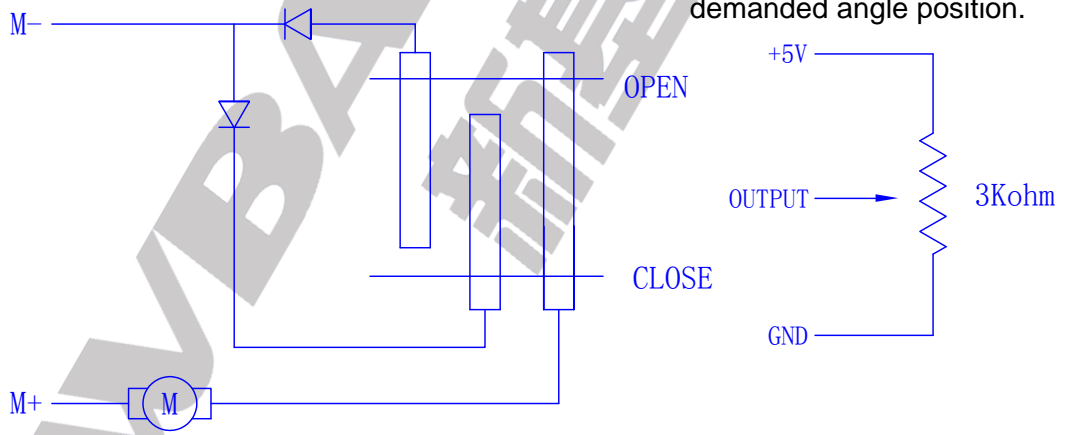

NAME			PART NO.	
DESIGNED		<b>ACTUATOR</b>		Temp Actuator
CHECKED				MATERIAL
APPROVED				
WEIGHT	SCALE	DATE	<b>NEWBASE AUTO ELECTRONICS CO.,LTD</b>	